


CHARGE ADMISSIBLE EN FONCTION DU COUPLE DE SERRAGE



weasyFIX
Innovative Construction Connectors

<u>Couple</u> (N-m.)	<u>Charge</u> (Kg)
80	240
90	279
100	320
110	363
120	408
130	455
140	504
150	555
160	608
170	663
180	720
190	779
200	840
210	903
220	968
230	1035
240	1104
250	1175

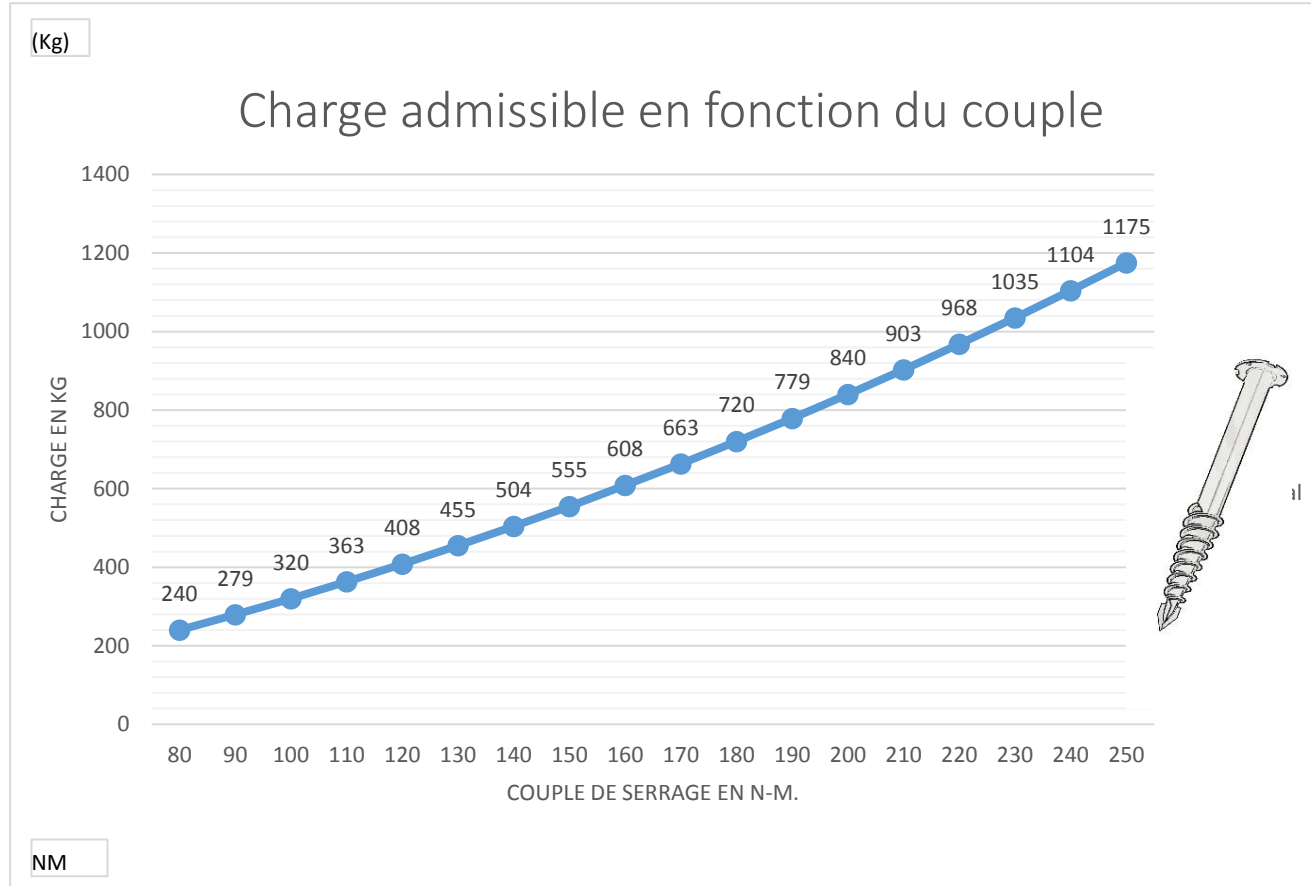

Enfoncement de la vis dans le sol minimum : 750 mm